

Emergency off button, standard.

Single phase or 3 phase electric motor.

Maximum cut $\varnothing 280\text{mm}$.
Standard features:
Fully guarded galvanised trough with front roller.
Timber grip handle & safety lock for 2 handed operation.
Wheels & handle for easy moving.

Tungsten tipped blade, $\varnothing 700\text{mm}$.

Sega Circolare GAMMA PRO

Patented brake system to comply with latest EC regulations, standard.

Timber grip handle, standard.

Adjustable guide for setting log length, standard.

Timber trough guard, standard.

Security lock for 2 handed use only, standard.

Twin handles for easy moving, standard.

PTO gearbox:
Pro model, aluminium.
Pro Plus model, Steel.

Standard features:
Galvanised trough & front roller.
Bearings on trough pivot.
Extending timber support.

Wheels, standard.

3-point linkage for PTO models.

Fully enclosed, standard.

Cod. Art.	Modello	Azionamento	Ø Disco	Ø Taglio	Peso	Ingombro - Dimensione
100.700	SC70C-P	PDF	700mm	280mm	170 kg	
100.705 M	SC70EM-P	230V - 3 HP	700mm	280mm	180 kg	
100.705 T	SC70ET-P	400V - 3 HP	700mm	280mm	180 kg	
100.706	SC70EM-PD	230V - 3 HP	700mm	280mm	110 kg	
100.704	SC60C-P	PDF	600mm	230mm	170 kg	
100.600 M	SC60EM-P	230V - 3 HP	600mm	230mm	180 kg	
100.600 T	SC60ET-P	400V - 3 HP	600mm	230mm	180 kg	
100.600 L	SC60EM-LIGHT	230V - 3 HP	600mm	230mm	110 kg	
100.708	SCM60E-PD	220V - 3 HP	600mm	230mm	110 kg	

SUPER-PRO Motore a scoppio

SEGHE CIRCOLARI

Patented brake system to comply with latest EC regulations, standard.

Patentnummer
PATENT NR.
102016000079449

Standard features:

Fully guarded galvanised trough & front roller.
Bearings on trough pivot.
Extending timber support.
Timber grip handle & security lock for 2 handed use only. Adjustable guide for setting log length.

9hp petrol engine with belt drive to blade.

13X5.00-6 tyres & two handles for easy moving.

Patented brake system to comply with latest EC regulations, standard.

Patentnummer
PATENT NR.
102016000079449

Full lighting kit & IVA approval for highway model.

4.50-10 wheels.

mudguards & rubber suspension on all towed models.

Standard features:

Fully guarded galvanised trough & front roller.
Bearings on trough pivot.
Extending timber support.
Timber grip handle & security lock for 2 handed use only. Adjustable guide for setting log length.

Yard tow model or optional full IVA approval.

Sega + Nastro Trasportatore


Patented brake system to comply with latest EC regulations, standard.

Patentnummer
PATENT NR.
102016000079449

Telescopic 4 or 5 meter output conveyor.

Hand winch for conveyor.

Galvanised conveyor trough.

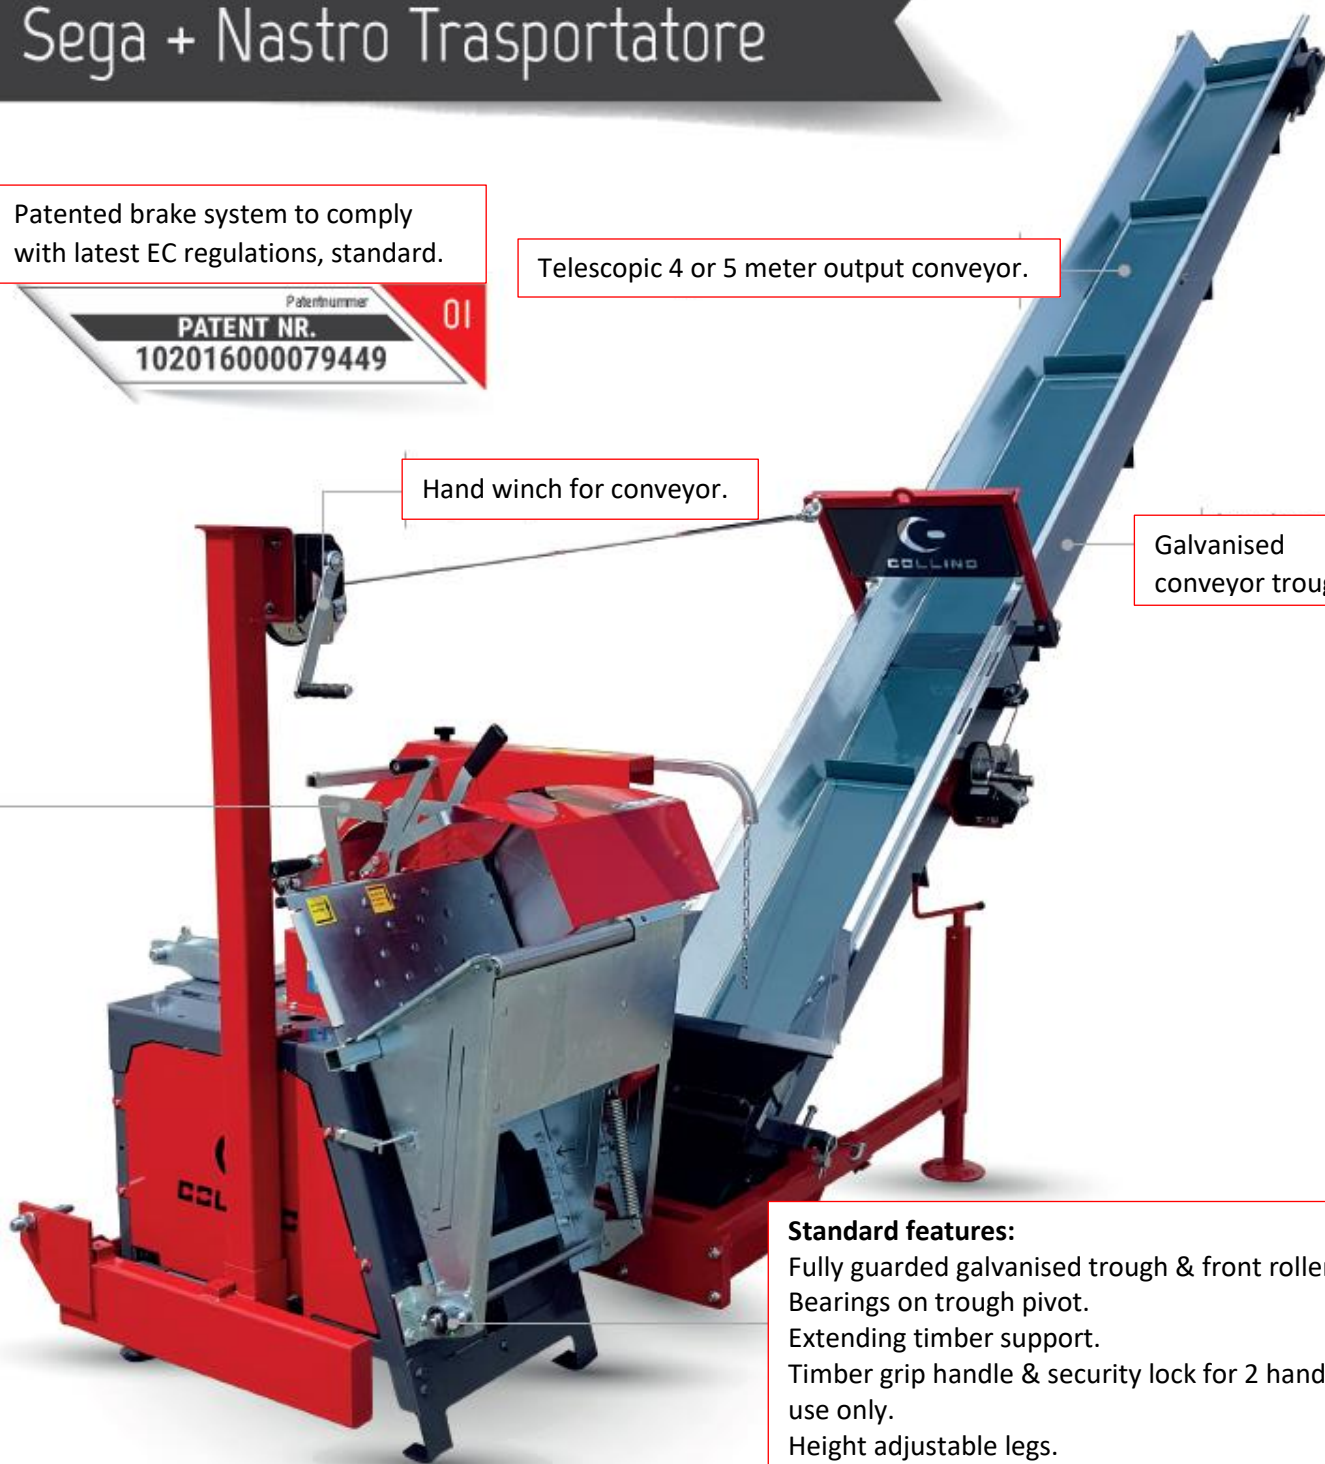

Standard features:

Fully guarded galvanised trough & front roller.
Bearings on trough pivot.
Extending timber support.
Timber grip handle & security lock for 2 handed use only.
Height adjustable legs.

Cod. Art.	Modello	Azionamento	Nastro lxl mm	Peso	Ingombro - Dimensione
100.200	SC70C-NT250I2	PTO	2000x250	315 kg	
100.400	SC70C-NT250I4	PTO	4000x250	486 kg	
100.500	SC70C-NT250I5	PTO	5000x250	516 kg	
100.444	SC70C-NT400I4	PTO	4000x400	470 kg	
100.455	SC70C-NT400I5	PTO	5000x400	492 kg	
101.401	SC70E-NT250I4	ET 400V	4000x250	500 kg	
101.402	SC70E-NT250I5	ET 400V	5000x250	530 kg	
100.403	SCM70C+E-NT250I4	PTO+ET	4000x250	530 kg	
100.404	SCM70C+E-NT250I5	PTO+ET	5000x250	560 kg	
101.601	SC70S-NT250I4	ROBIN SUBARU 14HP	4000x250	530 kg	
101.602	SC70S-NT250I5	ROBIN SUBARU 14HP	5000x250	560 kg	